
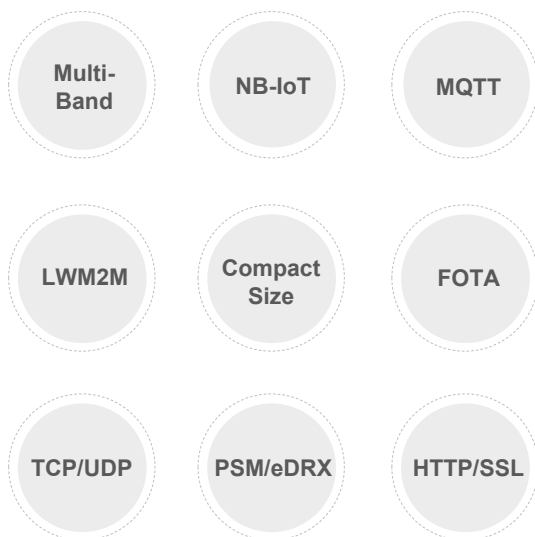


SIM7020 Series

SIMCom NB-IoT Module

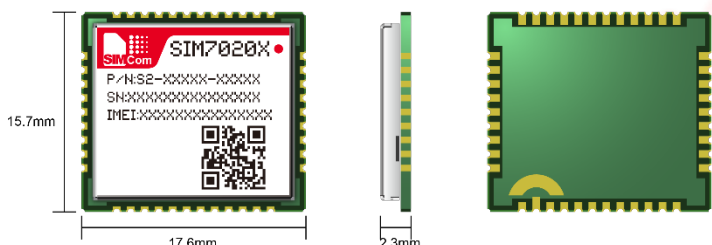

Product Description

The SIM7020 series is the LPWA module which supports wireless communication mode of Cat-NB.

The SIM7020 series adopts LCC¹ form factor and has a compact size of 17.6mm*15.7mm which makes it ideal for compact products design.

The SIM7020 series has powerful expansibility with abundant interfaces including UART, GPIO, I2C etc. The SIM7020 series is designed for applications that need low latency, low throughput data communication in a variety of radio propagation conditions. Due to the unique combination of performance, security and flexibility, this module is ideally suited for M2M applications, such as metering, asset tracking, remote monitoring, E-health etc.

NOTE

1: The form factor of SIM7020G and SIM7020G R13 is LCC+LGA

Key Benefits

- ◆ With Power Saving Mode(PSM) and Extended Discontinuous Reception(eDRX), the SIM7020 series can extend battery life up to 10 years
- ◆ The SIM7020 series provides deeper coverage enhancement compared to GSM
- ◆ The form factor and AT commands of the SIM7020 series are compatible with SIM800C

Product	SIM7020E	SIM7020E-ND	SIM7020E-D
Form Factor	LCC, 42PIN	LCC, 42PIN	LCC, 42PIN
Dimensions(mm)	17.6*15.7*2.3	17.6*15.7*2.3	17.6*15.7*2.3
Frequency Bands	Cat-NB	B1/B3/B5/B8/B20/B28	B1/B3/B5/B8/B20/B28
Temperature	-40℃ ~ +85℃	-40℃ ~ +85℃	-40℃ ~ +85℃
Electrical Features			
Supply Voltage Range(V)	2.1~ 3.6	3.0~ 3.6	2.1~ 3.6
Power Consumption	@PSM(uA)	3.4	3.4
	@Sleep(mA)	0.4	0.4
	@Idle(mA)	5.6	5.6
	@eDRX=655.36s(uA)	30	30
Data Transfer			
NB-IoT(kbps)	26.15(DL)/62.5(UL)	26.15(DL)/62.5(UL)	26.15(DL)/62.5(UL)
Software Features			
Protocol	TCP/UDP/HTTP/HTTPS/TLS/DTLS/DNS/NTP/PING/LWM2M/COAP/MQTT/MQTTS	TCP/UDP/HTTP/HTTPS/TLS/DTLS/DNS/NTP/PING/LWM2M/COAP/MQTT/MQTTS	TCP/UDP/HTTP/HTTPS/TLS/DTLS/DNS/NTP/PING/LWM2M/COAP/MQTT/MQTTS
FOTA	•	•	•
Embedded AT	•	•	•
Firmware Upgrade	UART/FOTA	UART/FOTA	UART/FOTA
Interfaces			
SIM Card	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART	•	•	•
USB	•	•	•
ADC	•	•	•
Embedded SIM	o	o	o
Certification			
Regulatory	CE/NCC/IMDA/ATEX/RoHS/REACH	CE/NCC/IMDA/ATEX/RoHS/REACH	CE/NCC/IMDA/ATEX/RoHS/REACH
Carrier	Deutsche Telekom	Deutsche Telekom	Deutsche Telekom

•: support o: optional *: on going

Product		SIM7020G	SIM7020G R13
Form Factor		LCC+LGA, 77PIN	LCC+LGA, 77PIN
Dimensions(mm)		17.6*15.7*2.3	17.6*15.7*2.3
Frequency Bands	Cat-NB	B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/B20/B25/B26/B28/B66/B70/B71/B85	B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/B20/B25/B26/B28/B66/B70/B71/B85
Temperature		-40℃ ~ +85℃	-40℃ ~ +85℃
Electrical Features			
Supply Voltage Range(V)		2.1~ 3.6	3.0~ 3.6
Power Consumption	@PSM(uA)	3.4	3.4
	@Sleep(mA)	0.4	0.4
	@Idle(mA)	5.6	5.6
	@eDRX=655.36s(uA)	30	30
Data Transfer			
NB-IoT (kbps)		126(DL)/150(UL)	26.15(DL)/62.5(UL)
Software Features			
Protocol		TCP/UDP/HTTP/HTTPS/TLS/DTLS/DNS/NTP/PING/LWM2M/COAP/MQTT/MQTTS	TCP/UDP/HTTP/HTTPS/TLS/DTLS/DNS/NTP/PING/LWM2M/COAP/MQTT/MQTTS
FOTA		•	•
Embedded AT		•	•
Firmware Upgrade		UART/FOTA	UART/FOTA
Interfaces			
SIM Card		1.8V/3.0V	1.8V/3.0V
UART		•	•
USB		•	•
ADC		•	•
Embedded SIM		o	o
Certification			
Regulatory		CE/FCC/GCF/PTCRB/ATEX/RoHS/REACH	CE/FCC/GCF/PTCRB/ATEX/RoHS/REACH
Carrier		Telstra*/Vodafone/Deutsche Telekom	Telstra*/Vodafone/Deutsche Telekom

<https://chipdatas.com/item/2plinbxc2-SIM7020C.html>

•: support o: optional *: on going